


LLC Series

Liquid Level Control

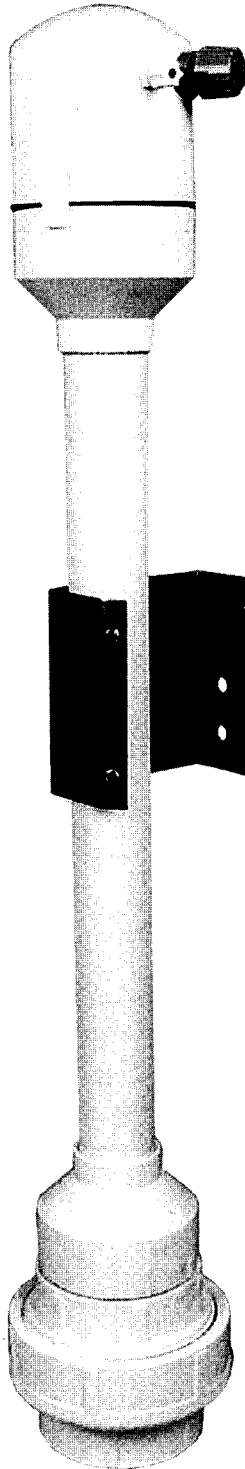

The ultimate in liquid control technology.

ADVANTAGES BY DESIGN

■ **Highly reliable**

- No grease, fat, or oil build-up on switch operating mechanism.
- Completely sealed switch not in contact with liquid.
- Unaffected by turbulent conditions.
- No power cords or electrical components in the liquid.

■ **Corrosion Resistant**

- Rugged PVC housing assembly.
- Stainless steel mounting bracket.
- Durable Nitrile diaphragm.

■ **Customized**

- Built to meet your requirements.
- Capable of handling up to 14 functions.
- 4' through 10' lengths.
- 10' through 50' cord lengths.
- 18" or 42" switching range.

■ **Maintenance Friendly**

- Quick and easy installations for new or retrofit systems.
- Number of functions and switch settings totally adjustable in the field.
- No tools required to service the unit.

■ **Full Two Year Warranty**

WHERE INNOVATION MEETS TRADITION


Myers[®]

Pentair Pump Group

Reliable service for a wide range of applications


- Sewage basins
- Lift stations
- Larger sump basins
- Septic tanks
- Cisterns
- Solution tanks
- Water storage tanks

Typical Installation

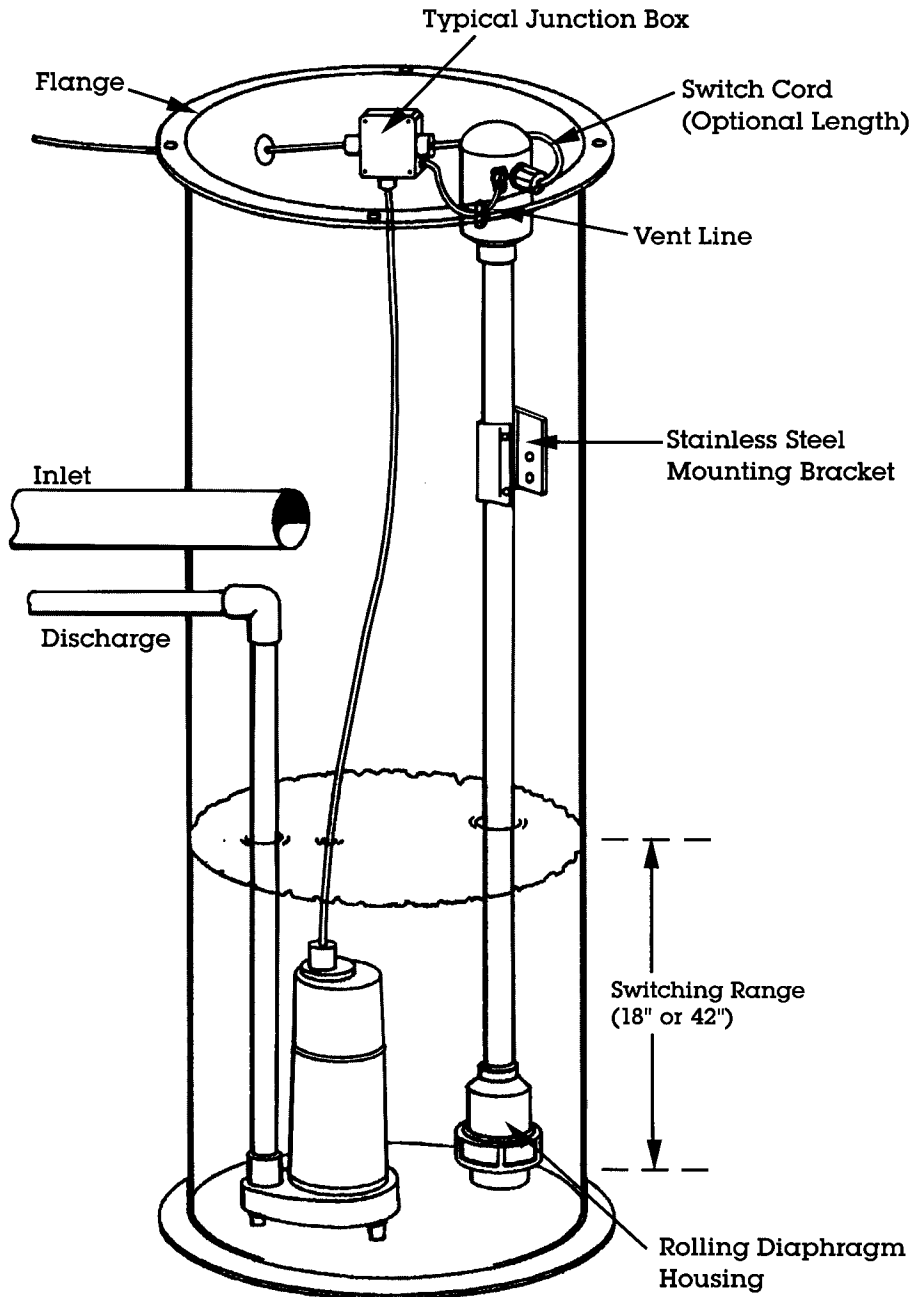

Patented, field proven . . . it works!

Materials of Construction	
Housing	PVC
Bracket	304 SST
Diaphragm	Nitrile
Power Cord	Type SOOW, 600V

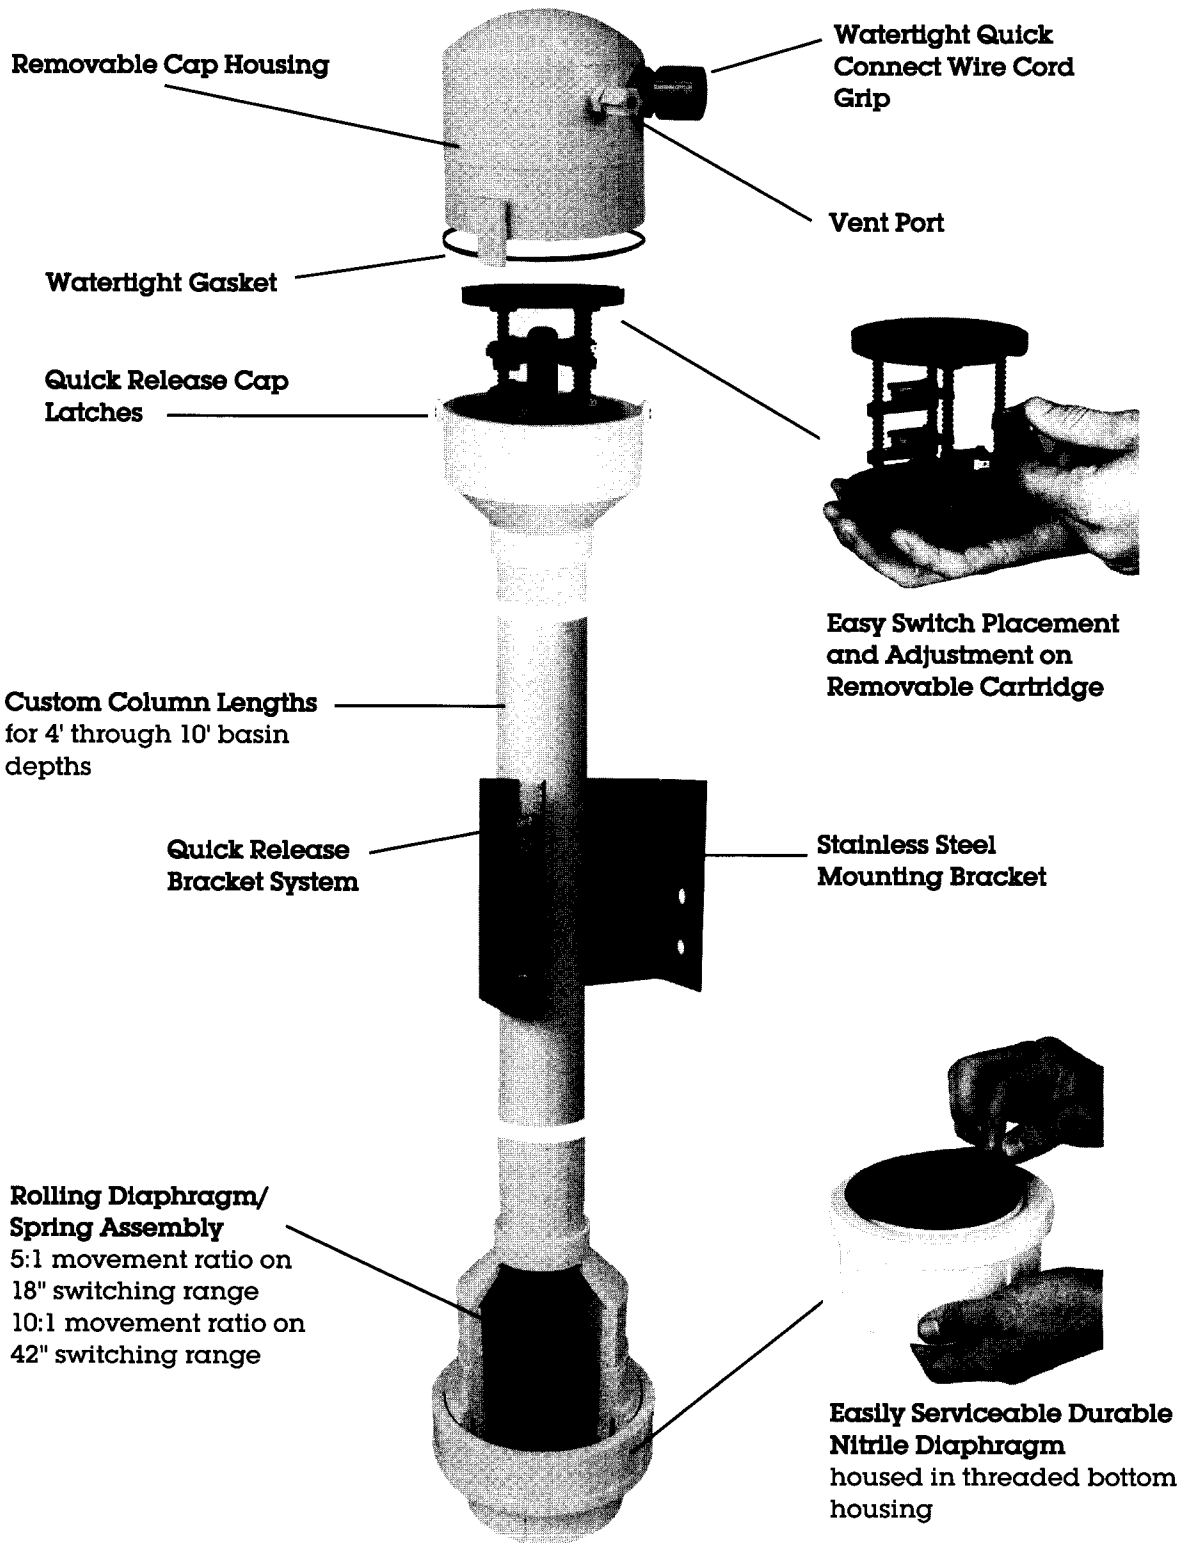

LLC Series

Liquid Level Control

Catalog Model	Basin Depth (feet)	Pressure Switch Length (inches)	Switch Range (inches)	Switches		Cord Length (feet)*
				Quantity	Amp Rating (120 VAC)	
LLC418	4'	41"	18"	4	5 amp	10'
LLC518	5'	53"	18"	4	5 amp	10'
LLC618	6'	65"	18"	4	5 amp	10'
LLC718	7'	77"	18"	4	5 amp	10'
LLC818	8'	89"	18"	4	5 amp	10'
LLC918	9'	101"	18"	4	5 amp	10'
LLC1018	10'	113"	18"	4	5 amp	10'
LLC442	4'	41"	42"	4	5 amp	10'
LLC542	5'	53"	42"	4	5 amp	10'
LLC642	6'	65"	42"	4	5 amp	10'
LLC742	7'	77"	42"	4	5 amp	10'
LLC842	8'	89"	42"	4	5 amp	10'
LLC942	9'	101"	42"	4	5 amp	10'
LLC1042	10'	113"	42"	4	5 amp	10'

NOTE: Optional cord lengths available (add to the end of the catalog model #)

- 20 (20' cord length)
- 30 (30' cord length)
- 50 (50' cord length)

Additional switches available
N5 (5 amp)